


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

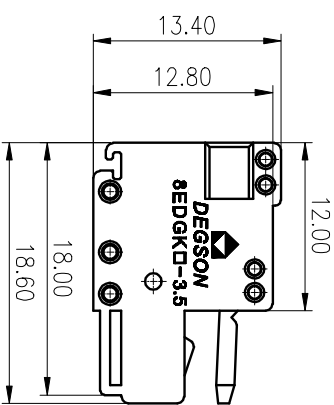

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side Housing1	PA66	UL94V-0
3	Housing	PA66	UL94V-0
4	Side Housing2	PA66	UL94V-0
5	Clamp	Copper alloy	Sn Plated
6	Spring	Stainless steel	

UL 标准 /UL Standard: B C D
 额定电压/电涌 /Rated Voltage(V)/Current(A) 300/710 / 300/710
 IEC 标准 /IEC Standard: B C D
 过压类别 /Overvoltage Category /污秽等级 /Pollution Degree III/3 III/2 II/2
 额定电压/电涌 /Rated Voltage(V)/Current(A) 130/10 / /
 额定脉冲电压 (KV) /Rate Impulse Voltage(KV) 2.5 / /
 拧紧扭矩 /Torque Tightening(N.m/Lb.in) / /
 线径范围 (裸线或绞线) /Wire Range(rigid and flexible)(mm² /AWG) 0.2~1.5/28~14
 间距 /Pitch(mm) /线数范围 /Poles 3.5/02~24P
 剥线长度 /Stripping length(mm) 6~7
 使用温度范围 /Operating Temperature(°C) -40~+105
 符合 RoHS 标准 /Conform to RoHS Yes
 标准颜色编号 /Standard color number: PANTONE 7534U
 PANTONE /RAL

MATERIAL: / SURFACE: /
 MAT NO.: /
 STATUS: /

NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

NAME: 8EDGK-3.5-XXP-11-01A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV	TO
1								1/1	T0

