

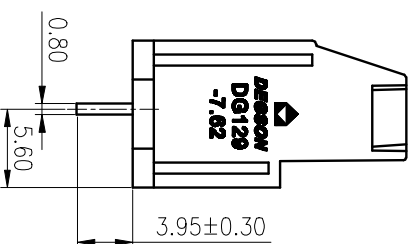
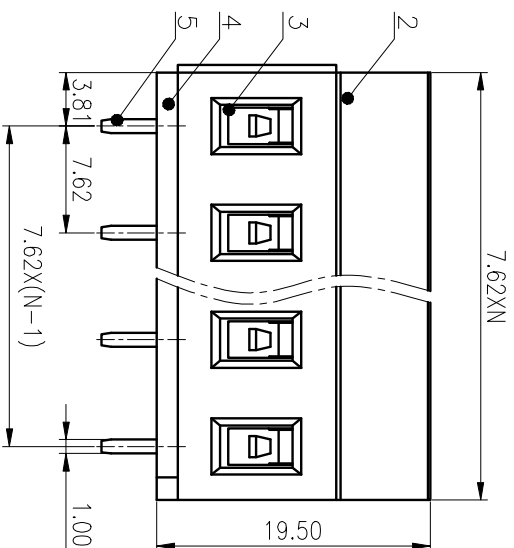



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	280	315	400	500	>500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

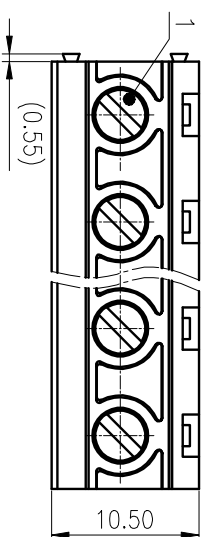

ITEM	NAME OF PART	MATERIAL	NOTES
1	Screw	Steel	M3/Zn Plated
2	Housing	PA66	UL94V-0
3	Cage	Copper alloy	M3/Ni Plated
4	Cover	PA66	UL94V-0
5	Pin header	Copper alloy	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/2		
额定电压/电压/Rated Voltage(V)/Current(A)	450/20		
工频耐压/Withstanding Voltage	AC2500V/1Min		
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.43		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~2.5/26~12		
剥线长度/Stripping length(mm)	7.62/N=02~16P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

PCB LAYOUT

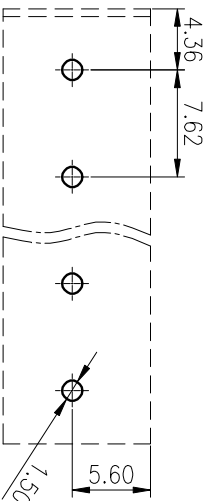

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD: LonChh	2020.03.19	NAME:	DG129-7.62-XXP-1Y-100A(H)
CHKD: YUJZ	2020.03.19	DRAWING NO.:	DG129-7.62-C22
DRAFT: Joy.z	2016.01.07	TYPE:	CUSTOMER DRAWING
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
SIZE: A4	SCALE: 2:1	REV	T1
1/1	1/1	1/1	1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD