
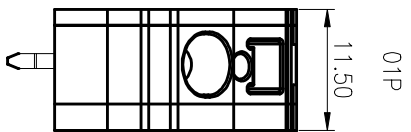
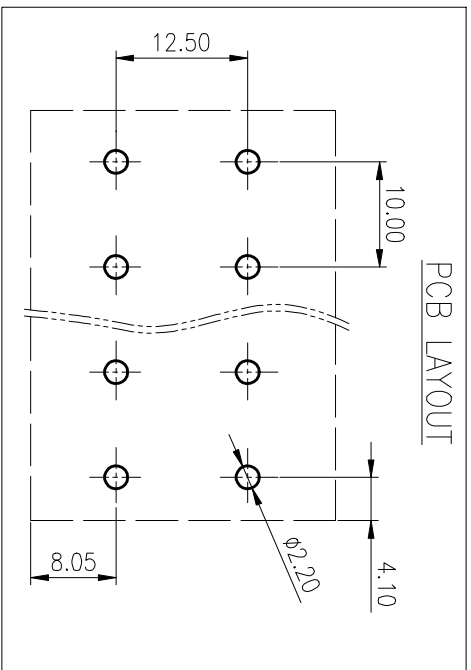
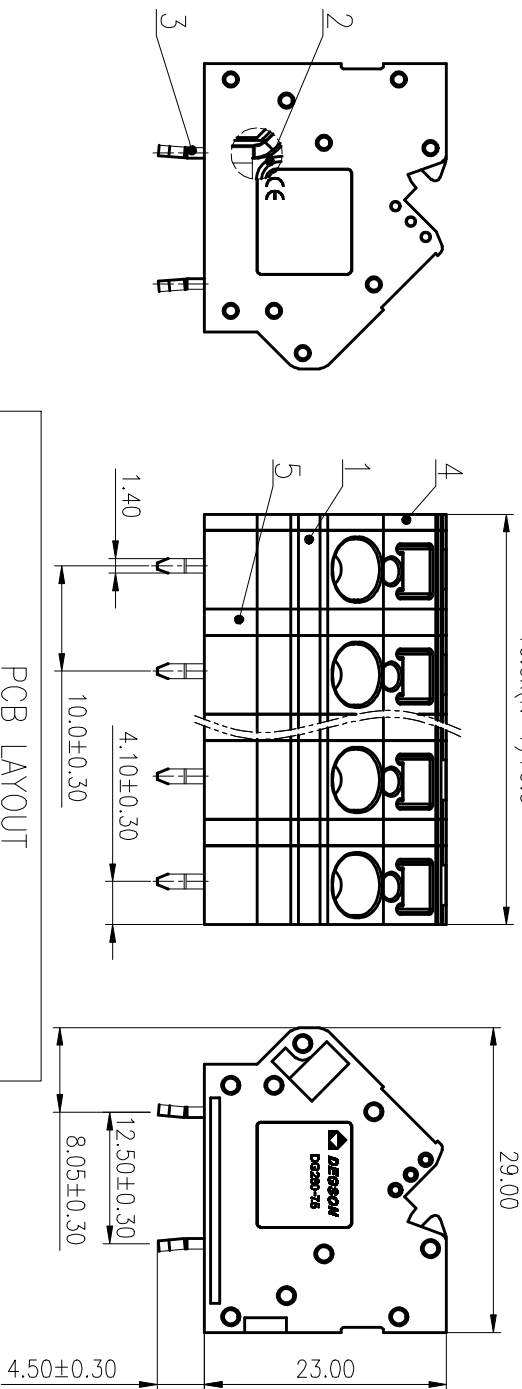


公差等级/General Tolerances(mm)		0.1/10	
0	>3	>10	>315
3	~6	~50	~400
6	10	80	500
10	18	120	~500
18	30	180	~500
30	50	250	~500
50	80	315	~500
80	~120	~315	~500
120	~180	~400	~500
180	~250	~500	~500
250	~315	~500	~500
315	~400	~500	~500
400	~500	~500	~500
500	~500	~500	~500
~500	~500	~500	~500
±0.12	±0.18	±0.22	±0.26
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.15
±1.60	±2.20	±2.50	±2.50
±Z	±Z	±Z	±Z

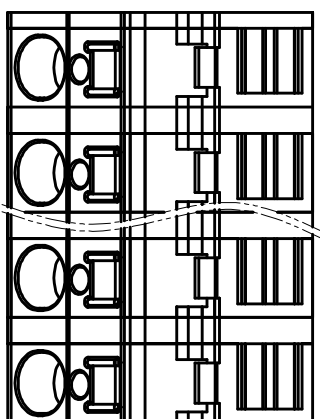

ITEM	NAME OF PART	MATERIAL	NOTES
5	Clashboard	PA66	UL94V-0
4	Cover	PA66	UL94V-0
3	Pin Header	Copper	Sn Plated
2	Spring	Stainless steel	/
1	Housing	PA66	UL94V-0

UL 标准	UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	/	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	630/32	630/32	1000/32	
额定脉冲电压/Rate Impulse Voltage(KV)	6	6	6	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4/24~10			
间距/Pitch(mm)/线径范围/Poles	10.0/N=01~12P			
剥线长度/Stripping length(mm)	10~11			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS要求/Conform to RoHS	Yes			

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.13
 CHKD: Ma EK 2020.06.13

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
DG260-10.0-XXP-1Y-00A(H)

DRAWING NO.: DG260-10.0-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1.5:1 SHEET 1/1

REV	EGN	DESCRIPTION	DRAFT	DATE