
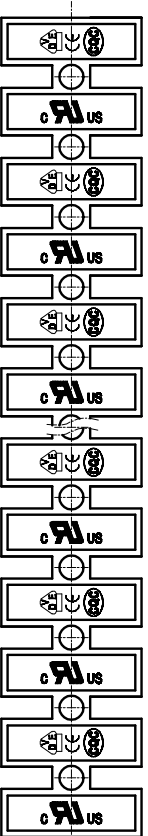
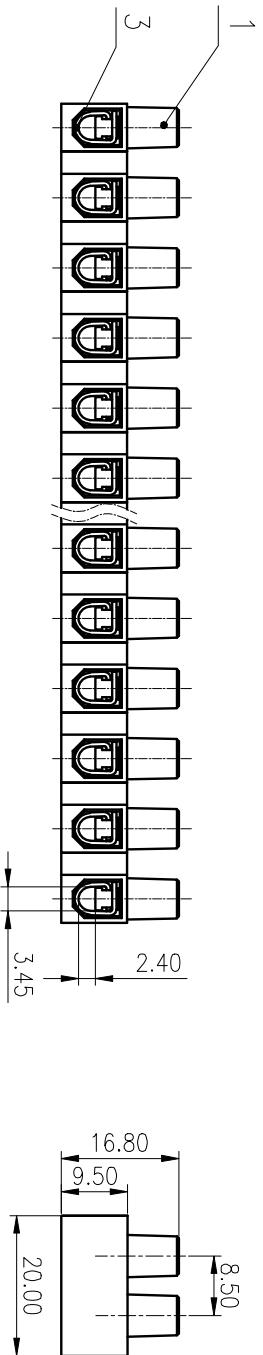


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

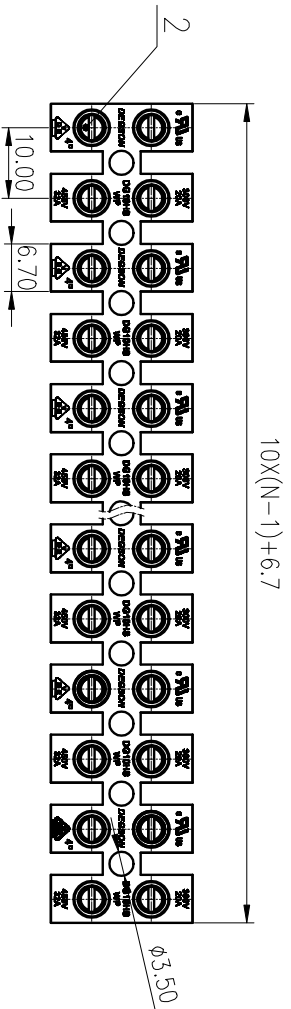

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300/20	/	300/70
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/ 污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌 /Rated Voltage(V)/Current(A)	/	450/32	/
额定脉冲电压 (kV) /Rate Impulse Voltage(kV)	/	2.5	/
拧紧扭矩 /Torque Tightening(N·m/Lb.in)	/	M2.6: 0.4/3.54	/
绞合范围 (硬线和软线) /Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	/	0.5~4/18~12	/
间距 /Pitch(mm) /线数范围 /Poles	/	10.0	/
剥线长度 /Stripping length(mm)	/	9	/
使用温度范围 /Operating temperature(°C)	/	-40~+105	/
符合 RoHS 要求 /Conform to RoHS	/	Yes	/

MATERIAL:	/
SURFACE:	/
MAT NO.:	/
STATUS:	/
APPD:	NAME:
CHKD:	DG10HSWP-1.2-XXP-1Y-100A(H)
DRAFT: WangY1	2020.05.21
DRAWING NO.:	DG10HSWP-C01
TYPE:	CUSTOMER DRAWING
SCALE:	1:1
SHEET:	1/1

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

REV	ECN	DESCRIPTION	DRAFT	DATE