


公差表 (General tolerances (mm))														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>310	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~310	~400	~500	~2	
±0.1	±0.1	±0.2	±0.2	±0.3	±0.3	±0.5	±0.8	±0.9	±1.0	±1.1	±1.6	±2.2	±2.5	±2

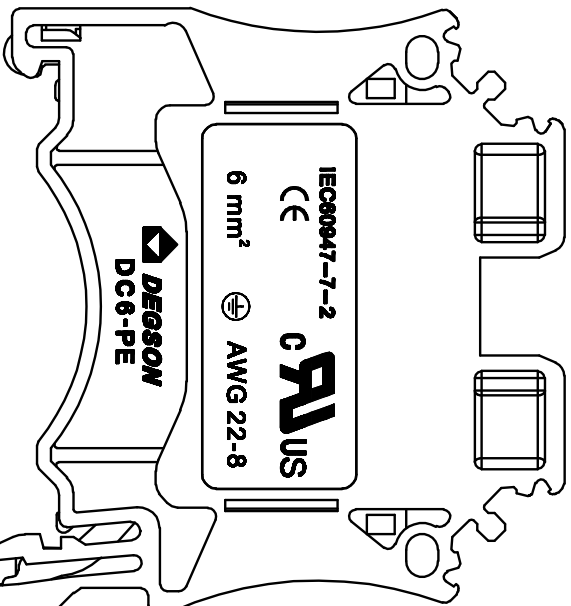

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	/	/
IEC 标准 / IEC Standard:	/	/	/
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	/	/
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)	8	/	/
额定扭矩 / Torque Tightening(N.m/Lbin)	M4, 1.54/14	/	/
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm² /AWG)	0.5~6/22~8	/	/
厚度 / Pitch(mm)	8.0	/	/
剥线长度 / Stripping length(mm)	10~12	/	/
使用温度范围 / Operating Temperature(°C)	-40~+105	/	/
符合 RoHS 环保要求 / Conform to RoHS	Yes	/	/
标准颜色编号 / Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: / SURFACE: /

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding body	Copper alloy	Sn Plated
4	Cage	Steel	Zn Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Steel	M4/Zn Plated
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MAT NO.: /  
 STATUS: /  
 Appd: Li QI 2020.05.23  
 CHKD: Moo J 2020.05.23  
 DRAFT: Wgmg LX 2020.05.23  
 DRAWING NO.: DC6-PE-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

**DEGSON®** 宁波高松电子有限公司  
**NINGBO DEGSON ELECTRICAL CO., LTD**  
**DC6-PE-01P-1C-00A(H)**