
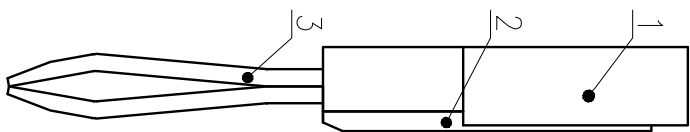


公差等级/General Tolerances(mm)		尺寸/Dimension										形位公差/Geometric Tolerance	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													

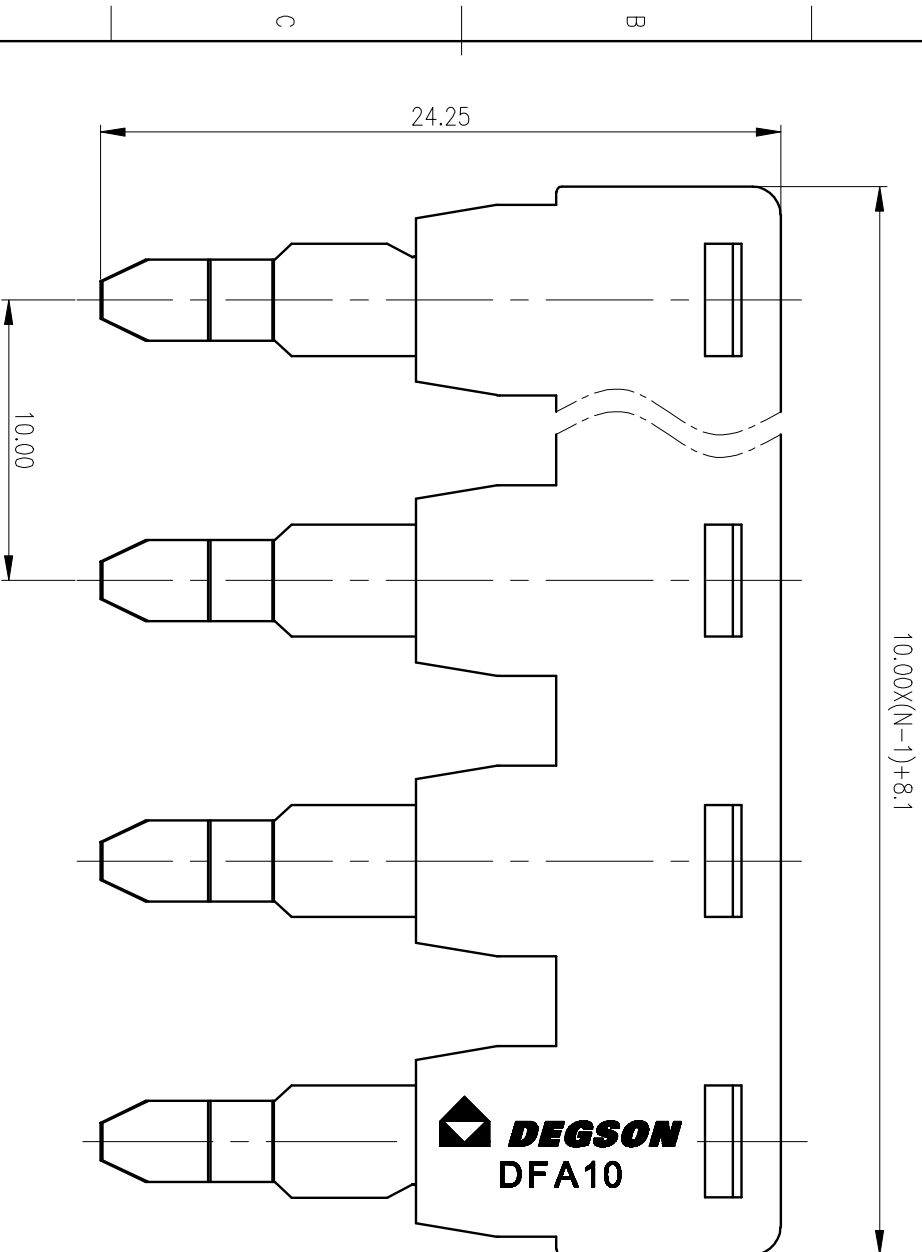

ITEM	NAME OF PART	MATERIAL	NOTES
3	Bridgework	Copper	
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

间距/Pitch(mm)/线距/Lead(Pales)
 使用温度范围/Operating Temperature(°C)
 符合RoHS环保要求/Conform to RoHS

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.04

CHKD: Moo J 2020.06.04

DRAFT:ZhengQG 2020.06.04

DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD
 宁波高松电子有限公司

NAME: DFA10-XXP-1Y-00A(H)

DRAWING NO.: DFA10-C01

TYPE: CUSTOMER DRAWING

SCALE: 4:1

REV	EGR	DESCRIPTION	DRAFT	DATE	REV	T0

SIZE: A4

SHEET 1/1