


Panoramica

Informazioni sul prodotto

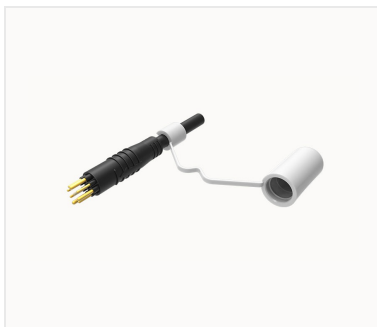

PM-EBM-3006-M-25010000005

Male connector with direct plug in and out. Rated current: 15A; Rated voltage: 48V DC; Withstand voltage: 500V AC; Insulation resistance > 30M Ω ; Protection grade meet IP67 when mated; Mechanical life $\geq$ 100 times; Pull out force > 60N; Operating temperature: - 40 ~ 105 $^{\circ}\text{C}$; Salt spray resistance : 48h; Flame retardant grade: UL94-v0; Environmental protection: RoHS.

Vantaggi del prodotto

- ☒ Small structure and high space utilization
- ☒ The male connector has a protective cover for easy protection of the terminals
- ☒ Straight plug operation, convenient and quick
- ☒ Beautiful appearance, more ergonomic design

Certificazione del prodotto

RoHS

Dati tecnici

Disegno del prodotto

Modello 3D

□

Marking

Series	DSB
	DM

versions

Connection method	Axial screw connection
Female/Male	Female
	16A
	2 module

Dimension	6B
	10B
	16B
	24B
	48B
Number of positions	5
	15

Accessori

Dati aziendali	
numero d'ordine	25010000005
Unità di imballaggio	
Quantità di ordine minimo	
Peso dei prodotti (senza imballaggio)	