
Overview

Product information

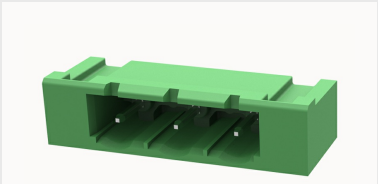

2EDGRMG-7.62-10030011792

Pluggable terminal blocks,Rated current:20A.Rated voltage（III/2）:400V,pitch:7.62mm,Color:Green,Contact surface :Tin

Product advantages

☑ PCB welding base
☑ Flexible supporting a variety of plugs

Product certification

Technical data

Product drawing

3D model

Overview

Number of rows	1

Electrical parameters UL

Rated voltage (B)	300V
Rated voltage (D)	300V
Rated current (B)	10A
Rated current (D)	10A

Electrical parameters IEC

Rated voltage(III/2)	300V
Rated surge voltage(III/2)	4KV

Item properties

Type of installation	PCB welding
Pin arrangement	Single row in a straight line
Pitch	7.62mm
Number of potentials	3
Pluggable or not	Yes

Material data

Environmental items	Compliant with REACH/RoHS
Contact material	Copper alloy
Contact point metal surface	tin-plated
Insulation Materials	PA66
Flammability rating	UL94V-0

Mechanical tests

Test Specification	IEC61984/ UL1059

Environmental data

Relative humidity (storage/transport)	30% ~ 70%
Ambient temperature (assembly)	-5℃~100℃
Ambient temperature (operation)	-40℃~105℃(depending on derating curve)
Ambient temperature (storage / transport)	-40℃~70℃

Accessories

Tool

Screwdriver	/
Operating tool	/

Accessories

Coding strip	2EDG-PWP-01AH
Bridge	/
Marking strip	/
Others	/

Business data

Order number	10030011792
Packing unit	570
Minimum order quantity	
Products weight (without packaging)	2.18